

# Panasonic

Document Scanner  
**KV-SL1066**  
**KV-SL1056**



## Smart Scan!

Various Documents Scan for Your Needs

High-Volume Scan with Durability

Smooth Scan with Reliable Feeding

**65 ppm / 130 ipm** [KV-SL1066]

**45 ppm / 90 ipm** [KV-SL1056]

(A4 / Letter, Portrait, 200 / 300 dpi)

**High-Volume, 100-sheets ADF**



## Specifications


		KV-SL1066	KV-SL1056
Scanning Face		Duplex	
Scanning Method		Colour CIS (600 dpi) / Black or White Background	
Scanning Resolution		100 - 600 dpi (1 dpi step) and 1200 dpi (interpolated) Optical: 300 dpi / 600 dpi (Automatic switch)	
Scanning Speed	Binary / Colour A4 size 200 / 300 dpi	Simplex Up to 65 ppm	Up to 45 ppm
		Duplex Up to 130 ipm	Up to 90 ipm
Automatic Detection		Intelligent double feed detection using ultrasonic sensor	
Image Compression		MH, MMR, JPEG	
Binary Mode Halftone		Dither, Error Diffusion	
Image Control		Auto preview, Auto rescan, Automatic Brightness Adjustment, Multi Colour Drop Out, Dynamic Threshold, White Level From Paper, Image Emphasis, Gamma, Automatic Separation, Noise Reduction	
Other Functions		Length Control, Patchcode Detection (Type 2, 3, T), Control Sheet Detection, Long Paper, Double Feed Skip	
Documents Paper Size*1 / Thickness / Weight	When 1 page.	Size: 48 mm x 54 mm (1.9 in. x 2.1 in.) - 216 mm x 5,588 mm (8.5 in. x 220 in.) Thickness: 0.04 mm - 0.5 mm (1.9 mils - 19.7 mils) Weight: 20 g/m <sup>2</sup> - 413 g/m <sup>2</sup> (5.4 lbs. - 110 lbs.) Note: 1 mil = 0.001 in.	
	When using ADF.	Size: 48 mm x 54 mm (1.9 in. x 2.1 in.) - 216 mm x 356 mm (8.5 in. x 14 in.) Thickness: 0.04 mm - 0.5 mm (1.9 mils - 19.7 mils) Weight: 20 g/m <sup>2</sup> - 413 g/m <sup>2</sup> (5.4 lbs. - 110 lbs.) Note: 1 mil = 0.001 in.	
Documents Card Size / Thickness		Size: 85.6 mm x 54 mm (3.4 in. x 2.1 in.) (ISO 7810 ID-1) Thickness: 0.76 mm (30.0 mils) Note: 1 mil = 0.001 in.	
Feed Tray Capacity		Up to 100 sheets 80 g/m <sup>2</sup> (21 lbs., A4 or Letter) or 3 hard cards (ISO7810 ID-1)	
Supported Operating System		Windows® XP (32bit SP3 or later / 64bit SP2 or later) Windows Vista® SP2 (32 / 64-bit), Windows® 7 (32 / 64-bit), Windows® 8 (32 / 64-bit), Windows® 8.1 (32 / 64-bit), Windows Server® 2003 SP2 (32 / 64-bit), Windows Server® 2003 R2 SP2 (32 / 64-bit), Windows Server® 2008 SP2 (32 / 64-bit), Windows Server® 2008 R2 SP1 (64-bit), Windows Server® 2012 (64-bit)	
Interface		USB 2.0	
External Dimensions (W x D x H)		300 mm x 272 mm x 238 mm (11.8 in. x 10.7 in. x 9.37 in.) (When the exit tray is closed)	
Weight		4.0 kg (8.8 lbs.)	
Power Requirement*2		AC 100 V - 125 V, 50 / 60 Hz or AC 220 V - 240 V, 50 / 60 Hz	
Power Consumption	Maximum (Scanning)	40 W or less	35 W or less
	Minimum (Ready)	8 W or less	
	Sleep	2.9 W or less	
	Power off	0.5 W or less	
Operating Environment		Temperature: 5 - 35 °C (41 - 95 °F) / Humidity: 20 - 80 % RH	
Storage Environment		Temperature: -10 - 50 °C (14 - 122 °F) / Humidity: 8 - 75 % RH	
Accessories		CD-ROM (Device Driver, ISIS driver software, TWAIN driver software, User Utility, Scan Button Setting Tool, Image Capture Plus with the OCR Engine, Operation manual, Control data sheet (PDF))  Quick Installation Guide, Power cord, USB cable (1.5 m (59 in.)), Mixed batch card guide	
Options	Flatbed Scanner	KV-SS081	
	Carrier sheet	KV-SS076	
	Consumables Roller exchange kit	KV-SS061	
	Roller cleaning paper	KV-SS03	

\*1 Image Size : 200dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 5,588 mm (8.5 x 220 in.)  
300dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 5,461 mm (8.5 x 215 in.)  
400dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 4,064 mm (8.5 x 160 in.)  
600dpi or less: 48 x 54 mm (1.9 x 2.1 in.) to 216 x 2,700 mm (8.5 x 106.3 in.)

\*2 The power requirement differs depending on the country/area.

- All photographs in this brochure are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.
- Use the mixed batch card guide when scanning mixed media (cards and papers) at the same time.
- Bound documents can be scanned by setting the manual feed selector to manual scanning (Manual).  
You can use an optional carrier sheet (KV-SS076) to scan passports using manual scanning.

## Dimensions

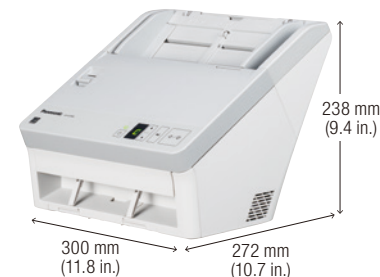

Flatbed Scanner  
**KV-SS081**



\*100 - 600 dpi (1 dpi step) (B/W and Colour)

Carrier sheet  
**KV-SS076**



\*5 per package

Roller exchange kit  
**KV-SS061**



Roller cleaning paper  
**KV-SS03**



\*10 per box



As an ENERGY STAR® partner, Panasonic has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



### Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.
- ABBYY is a registered trademark of ABBYY Software Ltd.
- ISIS is a registered trademark or trademark of EMC Corporation in the United States and other countries.
- Windows, Windows Vista and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- All other brand or product names are the property of their respective holders.

This product is designed to reduce hazardous chemical substances in accordance with the RoHS directive.

DISTRIBUTED BY :

# Panasonic

Document Scanner: <http://panasonic.net/pcc/products/scanner/>