

Energy saving Reach-in showcase
with sliding door

Single phase
220V
50Hz

Energy saving with LED lights

Easy installation
Plug-in type

Sliding door-easy to pick up
products even in narrow space



SRM-CDC319NL-TS3(E)

Technical data

Model	External dimension	Capacity	Performance	Light
SRM-CDC319NL-TS3(E)	L900 x D650 x H1947 (mm)	620 L	Cooling: 3 ~ 7 °C (AT27 °C, 70 %, less than 0.2 m/s, without direct sunlight)	LED out side 6 W x 1 in side 26 W x 1, 13 W x 2




Specification

Model		SRM-CDC319NL-TS3(E)
Dimensions (L x D x H) (mm)	External	900 x 650 x 1947
	Internal	820 x 475(shelf) x 1375
Effective Volume		620 L
Performance		Cooling: 3 ~ 7 °C (AT27 °C, 60 %, less than 0.2 m/s, without direct sunlight)
Material		Spray Steel Plate
Shelf		5 shelves
Insulation		Cyclopentane foam
Compressor		Obturation completed
Refrigerant		R134a
Evaporator		Fin type forced circulation
Temperature control		Electric controller
Condenser		Fin type forced circulation
Defrost		Timer-controlled natural defrosting with the compressor stopped
Light	out side LED	6 W x 1
	in side LED	26 W x 1, 13 W x 2
Power source		Single phase, 220 V, 50 Hz
Weight		125 kg

Dimensional outline drawing (mm)

SRM-CDC319NL-TS3(E)

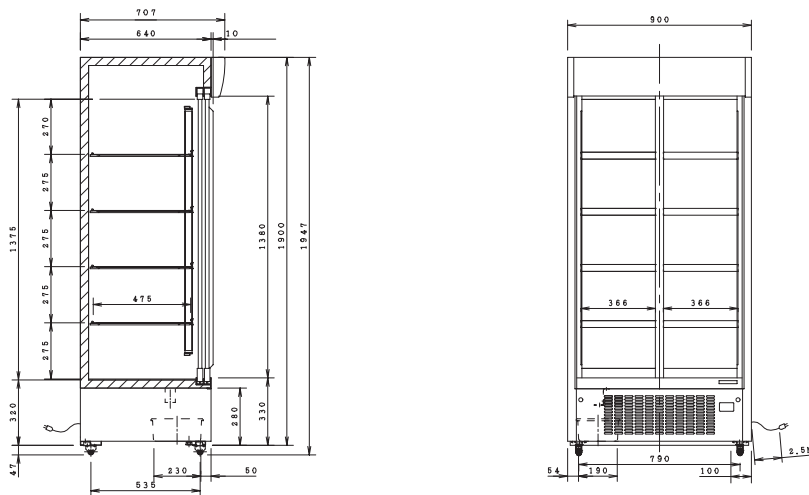

Safety Precaution

- All of our products in this catalog are designed for commercial use.
 - Please consult the operation & installation manual before use and operate the product correctly.
 - Please consult a Panasonic agent regarding product installation.
 - These products are for indoor use only, do not use them outdoors.
 - Please don't use these products for unintended purposes. Doing so could cause an accident.
 - Please take measures to prevent falls.
 - Do not use the products to store volatile or flammable substances such as benzene or alcohol cylinders. Doing so could cause an explosion.
 - Only use the products for exhibiting food items for sale or for temporary storage.
- Using the products for other purposes could cause a loss in quality of the items stored, among other problems.

※ All pictures are simulated.

※ Design and specification are subject to change without prior notice.

©Panasonic Commercial Equipment Systems Co., Ltd.

Panasonic Commercial Equipment Systems Asia Pacific
202 Bedok South Ave 1, Blk B #01-15, Singapore
TEL:+65 6338 6411

<Reference phone number>

Japan:+81 3 6364 3434

Thailand:+66 2712 2581

Hong Kong:+852 2367 0181

Taiwan:+8862 2598 0599

Philippines:+632 284 2300

Vietnam:+84 8 3813 1001

Panasonic®

The date of issue : October 2018
1904P-DH-CM301 ver1