




**Inverter Commercial Refrigerator**  
**Installable in various locations**

Single phase  
**220-240V**  
50, 60Hz

## Energy saving

## Excellent cooling

## Performance -25~-15°C

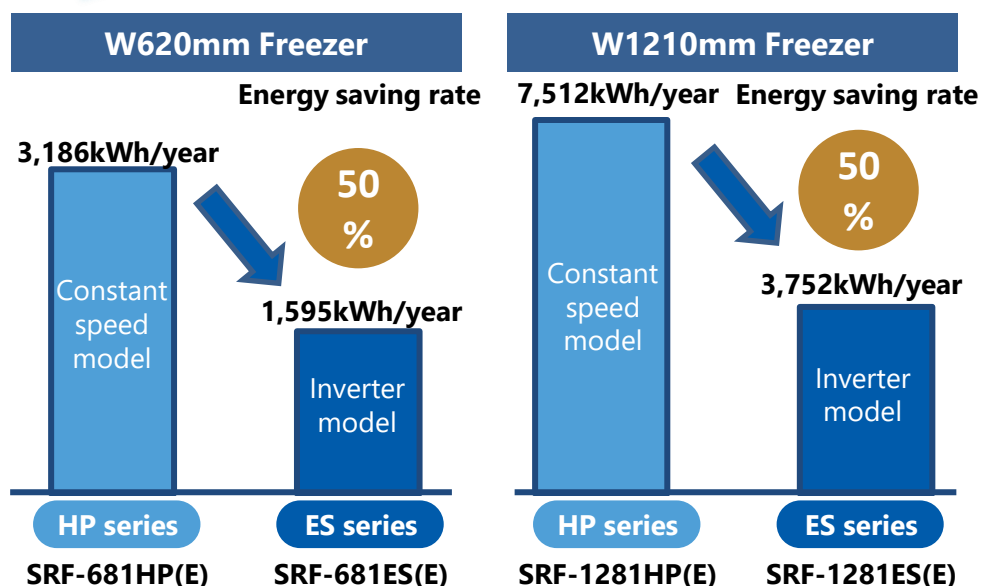

**SRF-781ES(E)**

\* Ambient condition 30°C 60%

\* Different environments and different types of goods and conditions inside will have different results

### Technical data

| Model         | External dimension             | Capacity | Performance   | Weight |
|---------------|--------------------------------|----------|---------------|--------|
| SRF-681ES(E)  | L620 x D832+(80) x H2000 (mm)  | 483 L    | -25°C ~ -15°C | 98 kg  |
| SRF-781ES(E)  | L745 x D832+(80) x H2000 (mm)  | 610 L    | -25°C ~ -15°C | 104 kg |
| SRF-1281ES(E) | L1210 x D832+(80) x H2000 (mm) | 1080 L   | -25°C ~ -15°C | 131 kg |
| SRF-1581ES(E) | L1460 x D832+(80) x H2000 (mm) | 1329 L   | -25°C ~ -15°C | 148 kg |
| SRF-1881ES(E) | L1800 x D832+(80) x H2000 (mm) | 1667 L   | -25°C ~ -15°C | 181 kg |



Inverter Control



Self Evaporation System



Center pillarless



Heater defrost



Bottom shelf is standard



Caster wheel



Right door model and left door model available

\* Only 2dpprs model is Available. Door can be Reversible at factory only.



IOT Monitoring


### Options

## Specification


| Model                          |           | SRF-681ES(E)                                   | SRF-781ES(E)          | SRF-1281ES(E)          | SRF-1581ES(E)          | SRF-1881ES(E)          |
|--------------------------------|-----------|------------------------------------------------|-----------------------|------------------------|------------------------|------------------------|
| Dimensions<br>(L x D x H) (mm) | External  | 620 x 832+(80) x 2000                          | 745 x 832+(80) x 2000 | 1210 x 832+(80) x 2000 | 1460 x 832+(80) x 2000 | 1800 x 832+(80) x 2000 |
|                                | Internal  | 484 x 684 x 1514                               | 609 x 682 x 1514      | 1074 x 682 x 1514      | 1324 x 682 x 1514      | 1664 x 682 x 1514      |
| Capacity (Effective)           |           | 483 L                                          | 610 L                 | 1080 L                 | 1329 L                 | 1667 L                 |
| Performance                    |           | -25°C ~ -15°C                                  |                       |                        |                        |                        |
| Material (Over/Inner)          |           | Stainless Steel                                |                       |                        |                        |                        |
| Insulation                     |           | Cyclopentane                                   |                       |                        |                        |                        |
| Compressor                     |           | HUAYI cubigel                                  |                       |                        |                        |                        |
| Refrigerant                    |           | R290                                           |                       |                        |                        |                        |
| Evaporator                     |           | Fin Type Forced Circulation                    |                       |                        |                        |                        |
| Temperature control            |           | Mini-computer control                          |                       |                        |                        |                        |
| Condenser                      |           | Fin Type Forced Circulation                    |                       |                        |                        |                        |
| Defrost                        |           | Mini-computer control ,Auto heating defrosting |                       |                        |                        |                        |
| Power source                   |           | Single phase 220~240V 50Hz/60Hz                |                       |                        |                        |                        |
| Power consumption              | Operation | 480 W                                          | 480 W                 | 810 W                  | 810 W                  | 850 W                  |
|                                | Defrost   | 370 W                                          | 370 W                 | 710 W                  | 710 W                  | 760 W                  |
| Weight                         |           | 98 kg                                          | 104 kg                | 131 kg                 | 148 kg                 | 181 kg                 |

## Dimensional drawing (mm)


SRF-681ES(E)

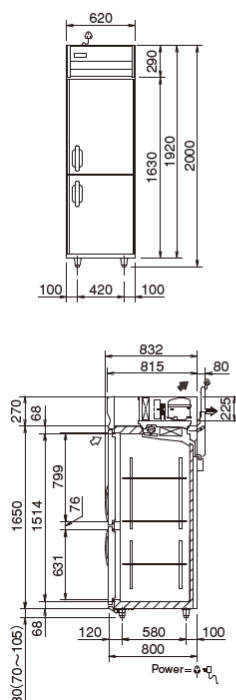


SRF-781ES(E)

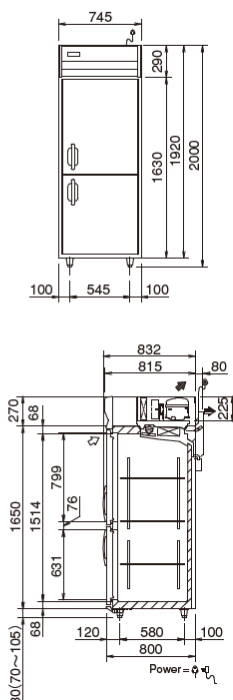


SRF-1281ES(E)

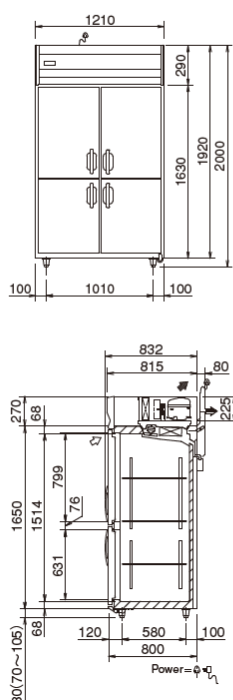

SRF-1581ES(E)

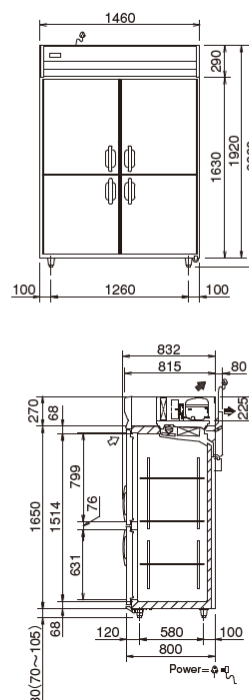

SRF-1881ES(E)

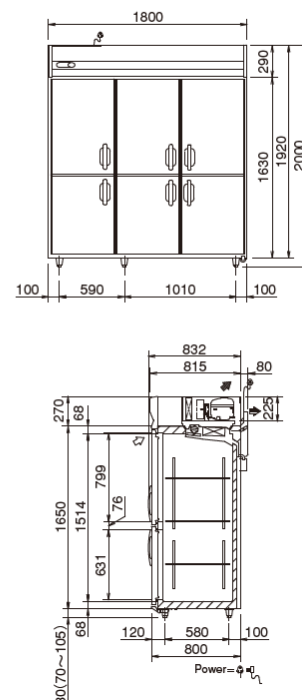

## Safety Precaution

- All of our products in this catalog are designed for commercial use.
  - Please consult the operation & installation manual before use and operate the product correctly.
  - Please consult a Panasonic agent regarding product installation.
  - These products are for indoor use only, do not use them outdoors.
  - Please don't use these products for unintended purposes. Doing so could cause an accident.
  - Please take measures to prevent falls.
  - Do not use the products to store volatile or flammable substances such as benzene or alcohol cylinders. Doing so could cause an explosion.
  - Only use the products for exhibiting food items for sale or for temporary storage.
- Using the products for other purposes could cause a loss in quality of the items stored, among other problems.

※ All pictures are simulated.

※ Design and specification are subject to change without prior notice.

©Panasonic Cold Chain Asia

**Panasonic Cold Chain Asia**

202 Bedok South Ave 1, Blk B # 01-15, Singapore  
 TEL : +65 6338 6411

**Panasonic Hong Kong Co., Ltd.**

Level 9, Tower II, Grand Century Place, 193 Prince Edward  
 Road West, Mongkok, Kowloon Hong Kong  
 TEL : +852 23670181

**Hong Kong and Macau Distributed By :**

Shun Hing Technology Co., Ltd.  
 TEL : +852 23130666

**Panasonic®**

The date of issue : July 2023