beverage which is commercial used in restaurant

FEATURES

Energy saving with LED lighting

Inside temperature 4~15°C

Stylish design

No need drain point

External Dimension (mm)

W 900 × D 530 × H 800

133L 4~15℃ 90kg (AT30°C, without direct sunlight)

Technical data Model **Extermal dimension Capacity (Effective)** Performance Weight BR-2U(E) W900x D530x H800(mm) Adjustable shelf Air cooled system Digital controller LED lighting September.2019

BUSINESS

Panasonic

	2 and
20000-0	
	Silver
Second.	
	■BR-2U(E)

Capacity (Effective)

133 Liter


Panasonic Beer Cooler is designed for beer and

Single phase 220V 50Hz

Beer cooler BR-2U(E)

Model		BR-2U(E)	
Dimensions (W x D x H) (mm)	External	900 x 530 x 800	
	Internal	820 x 378 x 645	
Performance		4~15°C(AT30°C, without direct sunlight)	
Capacity (Effective)		133L	
Material (Exterior)		Front : Glass / Outside : Stainless	
Insulation		Cyclopentane Horniness Froth	
Door		Aluminum Alloy Frame	
Shelves		4 shelves (adjustable) / Stainless Steel Shelf	
Refrigeration System	Compressor	Hermatic type	
	Refrigerant	R134a	
	Evaporator	Fin type forced circulation	
	Condenser	Fin type forced circulation of cold air	
	Temp Control	Automatic thermostat	
	Defrost	Off cycle defrost	
Power source		Single-phase, 220V / 50Hz	
Lamp		LED 6.5W	
Power consumption		385W	
Weight		90kg	

Dimensional drawing (mm)

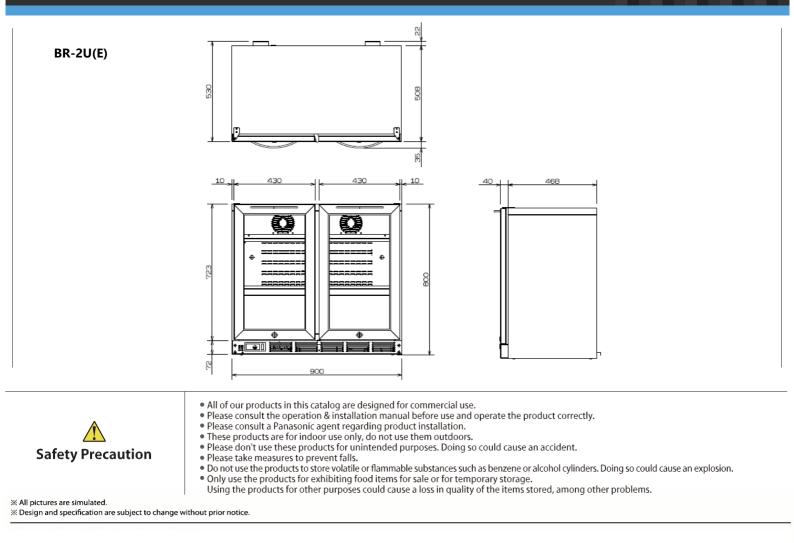



Hotline Tel: 2313 0666 Maintenance & Service Tel: 2570 5384



9/F, Peninsula Centre, 67 Mody Road, Tsimshatsui East, Kowloon, Hong Kong